

Phase and Timing Synchronization

Saravanan Vijayakumaran
sarva@ee.iitb.ac.in

Department of Electrical Engineering
Indian Institute of Technology Bombay

October 28, 2013

The System Model

- Consider the following complex baseband signal $s(t)$

$$s(t) = \sum_{i=0}^{K-1} b_i p(t - iT)$$

where b_i 's are complex symbols

- Suppose the LO frequency at the transmitter is f_c

$$s_p(t) = \text{Re} \left[\sqrt{2} s(t) e^{j2\pi f_c t} \right].$$

- Suppose that the LO frequency at the receiver is $f_c - \Delta f$
- The received passband signal is

$$y_p(t) = A s_p(t - \tau) + n_p(t)$$

- The complex baseband representation of the received signal is then

$$y(t) = A e^{j(2\pi \Delta f t + \theta)} s(t - \tau) + n(t)$$

The System Model

$$y(t) = Ae^{j(2\pi\Delta ft + \theta)} \sum_{i=0}^{K-1} b_i p(t - iT - \tau) + n(t)$$

- The unknown parameters are A , τ , θ and Δf
 - Timing Synchronization Estimation of τ
 - Carrier Synchronization Estimation of θ and Δf
- The preamble of a packet contains known symbols called the training sequence
- The b_i 's are known during the preamble

Carrier Phase Estimation

- The change in phase due to the carrier offset Δf is $2\pi\Delta fT$ in a symbol interval T
- The phase can be assumed to be constant over multiple symbol intervals
- Assume that the phase θ is the only unknown parameter
- Assume that $s(t)$ is a known signal in the following

$$y(t) = s(t)e^{j\theta} + n(t)$$

- The likelihood function for this scenario is given by

$$L(y|\theta) = \exp\left(\frac{1}{\sigma^2} \left[\text{Re}(\langle y, se^{j\theta} \rangle) - \frac{\|se^{j\theta}\|^2}{2} \right]\right)$$

- Let $\langle y, s \rangle = Z = |Z|e^{j\phi} = Z_c + jZ_s$

$$\begin{aligned}\langle y, se^{j\theta} \rangle &= e^{-j\theta} Z = |Z|e^{j(\phi-\theta)} \\ \text{Re}(\langle y, se^{j\theta} \rangle) &= |Z| \cos(\phi - \theta) \\ \|se^{j\theta}\|^2 &= \|s\|^2\end{aligned}$$


Carrier Phase Estimation

- The likelihood function for this scenario is given by

$$L(y|s_\theta) = \exp\left(\frac{1}{\sigma^2} \left[|Z| \cos(\phi - \theta) - \frac{\|s\|^2}{2} \right]\right)$$

- The ML estimate of θ is given by

$$\hat{\theta}_{ML} = \phi = \arg(\langle y, s \rangle) = \tan^{-1} \frac{Z_s}{Z_c}$$

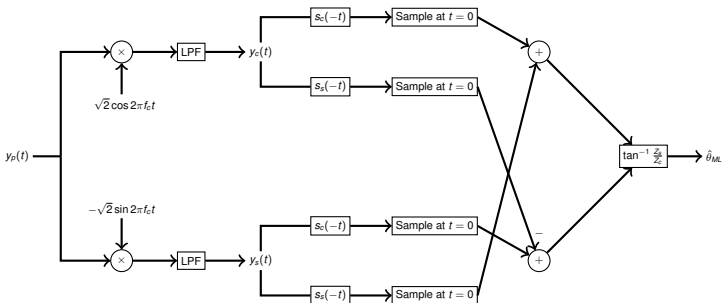

Phase Locked Loop

- The carrier offset will cause the phase to change slowly
- A tracking mechanism is required to track the changes in phase
- For simplicity, consider an unmodulated carrier

$$y_p(t) = \sqrt{2} \cos(2\pi f_c t + \theta(t)) + n_p(t)$$

- The complex baseband representation is

$$y(t) = e^{j\theta(t)} + n(t)$$

- For an observation interval T_o , the log likelihood function is given by

$$\ln L(y|\theta) = \frac{1}{\sigma^2} \left[\operatorname{Re} \left(\langle y, e^{j\theta(t)} \rangle \right) - \frac{T_o}{2} \right]$$


- We get $\hat{\theta}_{ML}$ by maximizing

$$J[\theta(t)] = \operatorname{Re} \left(\langle y, e^{j\theta(t)} \rangle \right) = \int_0^{T_o} [y_c(t) \cos \theta(t) + y_s(t) \sin \theta(t)] dt$$

Phase Locked Loop

- A necessary condition for a maximum at $\hat{\theta}_{ML}$ is

$$\begin{aligned}\frac{\partial}{\partial \theta} \mathcal{J}[\theta(t)] \Big|_{\hat{\theta}_{ML}} = 0 &\implies \int_0^{T_o} [-y_c(t) \sin \hat{\theta}_{ML} + y_s(t) \cos \hat{\theta}_{ML}] dt = 0 \\ &\implies \operatorname{Re} \left(\langle y, j e^{j \hat{\theta}_{ML}} \rangle \right) = 0 \\ &\implies \langle y_p, -\sin(2\pi f_c t + \hat{\theta}_{ML}) \rangle = 0 \\ &\implies - \int_{T_o} y_p(t) \sin(2\pi f_c t + \hat{\theta}_{ML}) dt = 0\end{aligned}$$

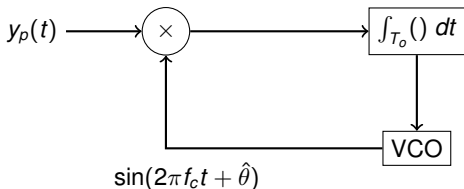

Symbol Timing Estimation

- Consider the complex baseband received signal

$$y(t) = As(t - \tau)e^{j\theta} + n(t)$$

where A , τ and θ are unknown and $s(t)$ is known

- For $\gamma = [\tau, \theta, A]$ and $s_\gamma(t) = As(t - \tau)e^{j\theta}$, the likelihood function is

$$L(y|\gamma) = \exp\left(\frac{1}{\sigma^2} \left[\operatorname{Re}(\langle y, s_\gamma \rangle) - \frac{\|s_\gamma\|^2}{2} \right]\right)$$

- For a large enough observation interval, the signal energy does not depend on τ and $\|s_\gamma\|^2 = A^2\|s\|^2$
- For $s_{MF}(t) = s^*(-t)$ we have

$$\begin{aligned}\langle y, s_\gamma \rangle &= Ae^{-j\theta} \int y(t)s^*(t - \tau) dt \\ &= Ae^{-j\theta} \int y(t)s_{MF}(\tau - t) dt \\ &= Ae^{-j\theta}(y \star s_{MF})(\tau)\end{aligned}$$

Symbol Timing Estimation

- Maximizing the likelihood function is equivalent to maximizing the following cost function

$$J(\tau, A, \theta) = \operatorname{Re} \left(A e^{-j\theta} (y \star s_{MF})(\tau) \right) - \frac{A^2 \|s\|^2}{2}$$

- For $(y \star s_{MF})(\tau) = Z(\tau) = |Z(\tau)| e^{j\phi(\tau)}$ we have

$$\operatorname{Re} \left(A e^{-j\theta} (y \star s_{MF})(\tau) \right) = A |Z(\tau)| \cos(\phi(\tau) - \theta)$$


- The maximizing value of θ is equal to $\phi(\tau)$
- Substituting this value of θ gives us the following cost function

$$J(\tau, A) = \operatorname{argmax}_{\theta} J(\tau, A, \theta) = A |(y \star s_{MF})(\tau)| - \frac{A^2 \|s\|^2}{2}$$

Symbol Timing Estimation



- The ML estimator of the delay picks the peak of the matched filter output

$$\hat{\tau}_{ML} = \underset{\tau}{\operatorname{argmax}} |(y \star s_{MF})(\tau)|$$

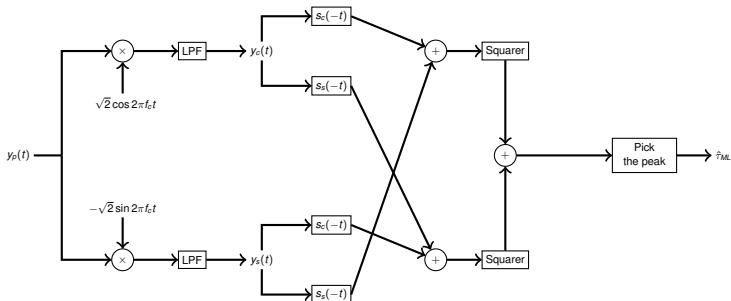


Early-Late Gate Synchronizer

- Timing tracker which exploits symmetry in matched filter output




Early-Late Gate Synchronizer

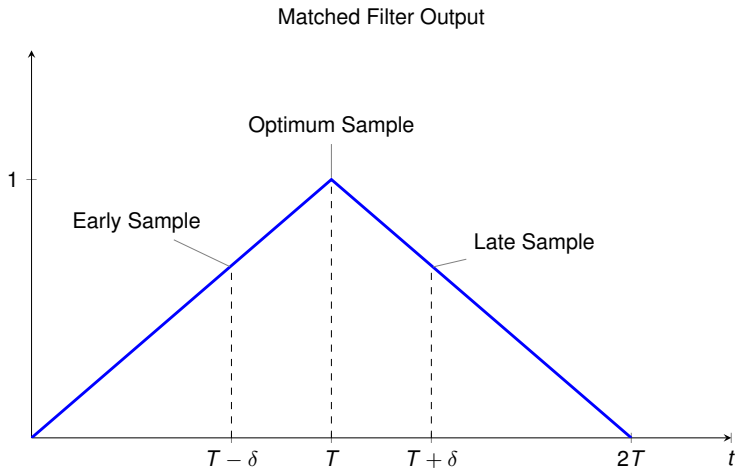

- The values of the early and late samples are equal

Early-Late Gate Synchronizer

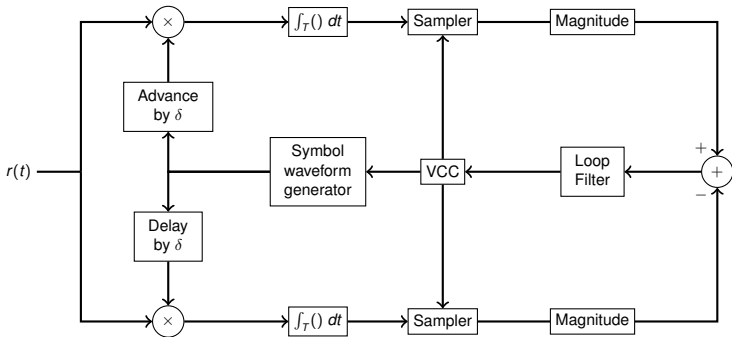

- The motivation for this structure can be seen from the following approximation

$$\frac{dJ(\tau)}{d\tau} \approx \frac{J(\tau + \delta) - J(\tau - \delta)}{2\delta}$$

Thanks for your attention