


xfmr_level0_1ph_1_2.ece

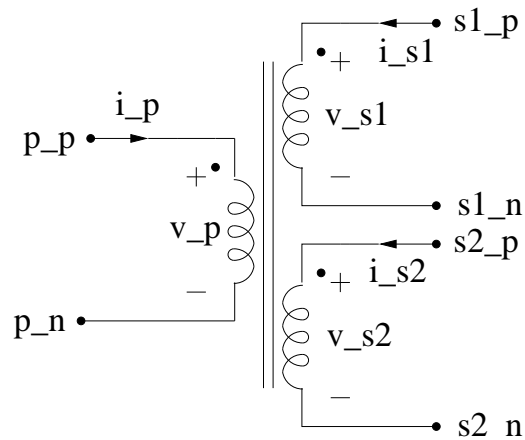

Attributes

```
mainnodes:
+ p_p p_n
+ s1_p s1_n
+ s2_p s2_n
outvar:
+ v_p=v_p_of_x0
+ v_s1=v_s1_of_x0
+ v_s2=v_s2_of_x0
+ i_p=cur(p_p)_of_x0
+ i_s1=cur(s1_p)_of_x0
+ i_s2=cur(s2_p)_of_x0
rparms:
+ p_turns=1
+ s1_turns=1
+ s2_turns=1
```

Description

xfmr_level0_1ph_1_2.ece is a transformer with one primary and two secondary windings (see figure). The model includes ideal transformer equations. **p_xxx**, **s1_xxx**, and **s2_xxx** are used to denote node and parameter names on the primary (p) and secondary (s1 and s2) sides, respectively. Currents and voltages shown in the figure are made available as output variables.

The model equations incorporated for the ideal transformers are:

$$\begin{aligned}\frac{V_p}{N_p} &= \frac{V_{s1}}{N_{s1}}, \\ \frac{V_p}{N_p} &= \frac{V_{s2}}{N_{s2}}, \\ N_p i_p + N_{s1} i_{s1} + N_{s2} i_{s2} &= 0.\end{aligned}$$

As with other transformer elements, the user should make sure that there is a “dummy” connection between the secondary sides and the primary side so that all node voltages get defined with respect to the same reference node (see comments in the help file for `xfmr_level0_1ph.ece`, for example).

AC behaviour is not implemented.